


ECA

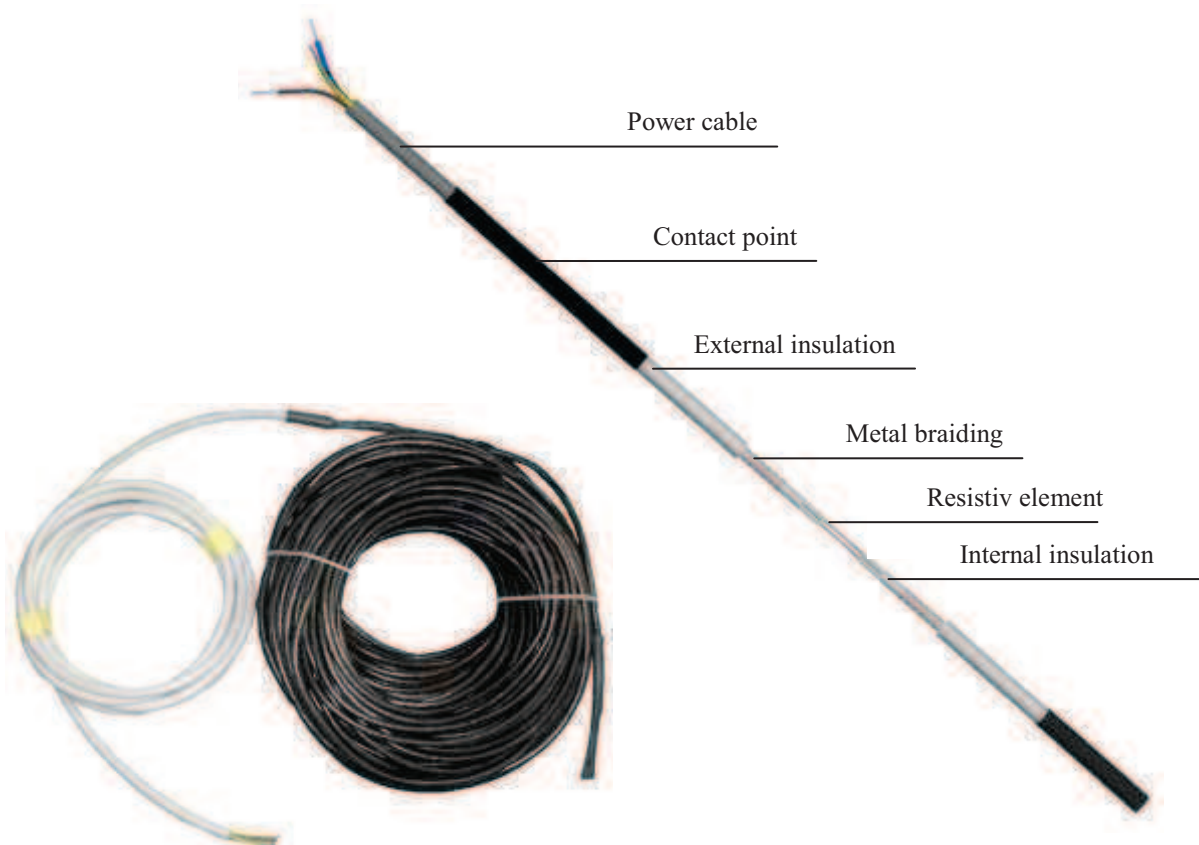


- Structure of the cable: heating cable with double conductor resistive
- Internal insulation of the cable: fluoropolymer (FEP) – 0,3 mm
- Metal braiding: with 48 wire Ø0,17 mm tinned copper
- External insulation of the cable: PVC resistant to 105°C – 1,8 mm
- Outer diameter of the cable: 6,2 ÷ 8,9 mm
- Volt supply 230 Vac
- Protection class II
- Protection grade IP67
- Tolerance: from 25 to 200 W: ±10%, higher 200 W: +5% +20 W (choose the higher) -10%
- Minimum curvature radius: 4 times the diameter of the cable
- Power cable: 3*1.5 FG7 long 5 m
- UV protection: YES
- Self extinguishing cable: YES
- Colour of the cable: Black
- Marking of the cable: "C DESIGN * ICA xxx Ohm / m * CE * set – year"
- Certification 
- The company reserves the right to change without notice specifics of the products details declining any responsibility for uncorrected data

MADE IN ITALY

ECA : EXTERNAL CABLE HANK

	Description	Code	Power	Leght warm cable	Weight
15 W/ml	ECA 15-210	024010001	210 W	14,0 m	2,11 kg
	ECA 15-350	024020001	350 W	23,6 m	2,82 kg
	ECA 15-540	024030001	540 W	36,2 m	3,76 kg
	ECA 15-630	024040001	630 W	41,9 m	4,18 kg
	ECA 15-810	024050001	810 W	54,4 m	5,10 kg
	ECA 15-1050	024060001	1050 W	69,9 m	6,25 kg
	ECA 15-1150	024070001	1150 W	76,6 m	6,75 kg
	ECA 15-1500	024080001	1500 W	97,9 m	8,32 kg
	ECA 15-2100	024090001	2100 W	139,9 m	11,43 kg
	ECA 15-3150	024100001	3150 W	209,9 m	16,61 kg
20 W/ml	ECA 20-240	024210001	240 W	12,2 m	1,98 kg
	ECA 20-400	024220001	400 W	20,6 m	2,60 kg
	ECA 20-630	024230001	630 W	31,1 m	3,38 kg
	ECA 20-730	024240001	730 W	36,2 m	3,76 kg
	ECA 20-950	024250001	950 W	46,4 m	4,51 kg
	ECA 20-1000	024260001	1000 W	50,0 m	4,78 kg
	ECA 20-1200	024270001	1200 W	61,2 m	5,61 kg
	ECA 20-1300	024280001	1300 W	67,8 m	6,10 kg
	ECA 20-1700	024290001	1700 W	86,4 m	7,47 kg
	ECA 20-2400	024300001	2400 W	122,4 m	10,14 kg
	ECA 20-3600	024310001	3600 W	183,6 m	14,67 kg
25 W/ml	ECA 25-270	024410001	270 W	10,8 m	1,88 kg
	ECA 25-450	024420001	450 W	18,3 m	2,43 kg
	ECA 25-700	024430001	700 W	27,9 m	3,15 kg
	ECA 25-800	024440001	800 W	33,0 m	3,52 kg
	ECA 25-1050	024450001	1050 W	41,9 m	4,18 kg
	ECA 25-1350	024460001	1350 W	54,4 m	5,10 kg
	ECA 25-1480	024470001	1480 W	59,5 m	5,48 kg
	ECA 25-1900	024480001	1900 W	77,3 m	6,80 kg
	ECA 25-2700	024490001	2700 W	108,8 m	9,13 kg
	ECA 25-4000	024500001	4000 W	165,3 m	13,31 kg
30 W/ml	ECA 30-300	024610001	300 W	9,8 m	1,80 kg
	ECA 30-500	024620001	500 W	16,5 m	2,30 kg
	ECA 30-760	024630001	760 W	25,7 m	2,99 kg
	ECA 30-880	024640001	880 W	30,0 m	3,30 kg
	ECA 30-1150	024650001	1150 W	38,3 m	3,92 kg
	ECA 30-1500	024660001	1500 W	48,9 m	4,70 kg
	ECA 30-1600	024670001	1600 W	55,1 m	5,15 kg
	ECA 30-2100	024680001	2100 W	69,9 m	6,25 kg
	ECA 30-3000	024690001	3000 W	97,9 m	8,32 kg
	ECA 30-4400	024600001	4400 W	150,2 m	12,20 kg
	Iron strip	020000001		10 m	0,54 kg
	CLIP	020000002		50 pz	0,07 kg

ACCESSORIES ECA




IRON STRIP



CLIP

ECAS

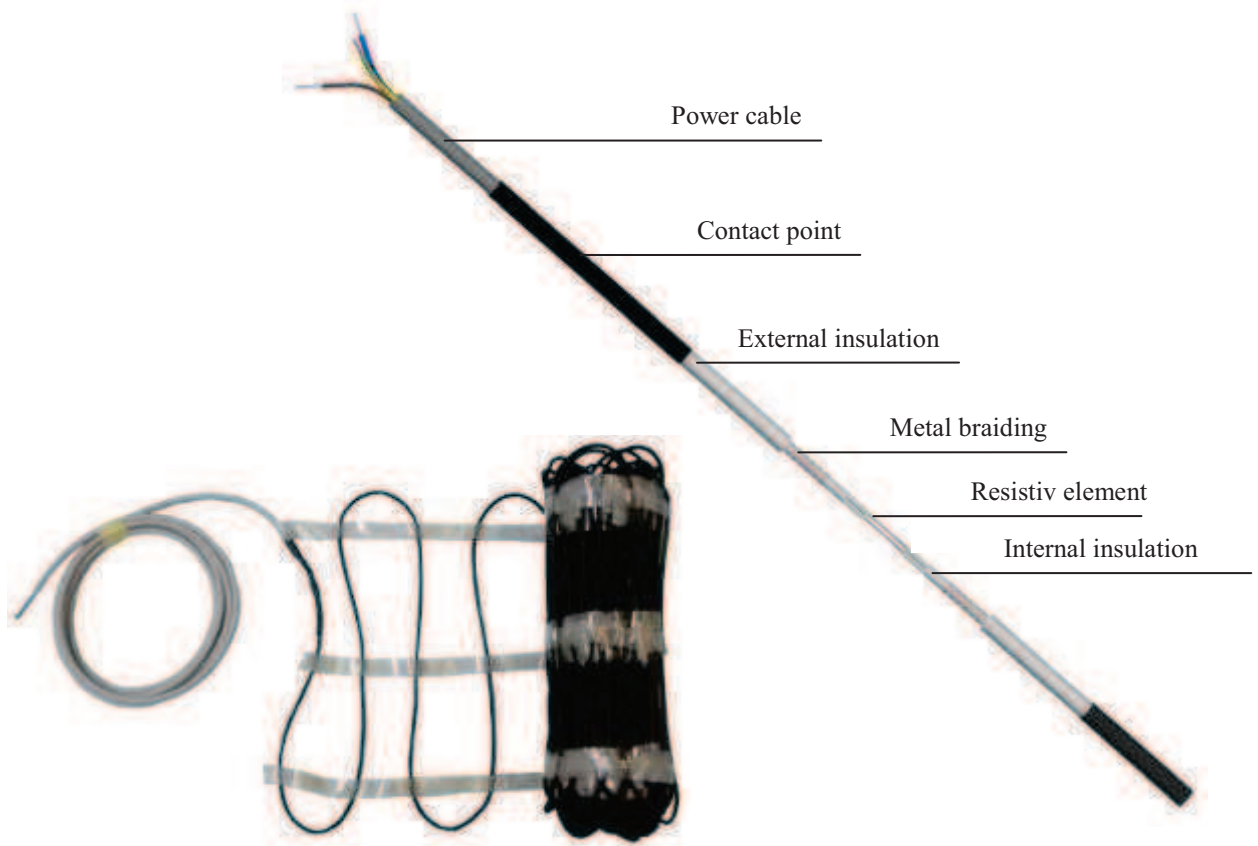


- Structure of the cable: heating cable with double conductor resistive pre assembled on scotch
- Width of the strip: 50 cm
- Internal insulation of the cable: fluoropolymer (FEP) – 0,3 mm
- Metal braiding: with 48 wire Ø0,17 mm tinned copper
- Internal insulation of the cable: PVC resistant to 105°C – 1,8 mm
- Outer diameter of the cable: 6,2 ÷ 8,9 mm
- Volt supply 230 Vac
- Protection class II
- Protection grade IP67
- Tolerance: from 25 to 200 W: ±10%, higher 200 W: +5% +20 W (choose the higher) -10%
- Minimum curvature radius: 4 times the diameter of the cable
- Power cable: 3*1.5 FG7 long 5 m
- UV protection: YES
- Self extinguishing cable: YES
- Colour of the cable: Black
- Marking of the cable: “C DESIGN * ICA xxx Ohm / m * CE * set – year”
- Certification 
- The company reserves the right to change without notice specifics of the products details declining any responsibility for uncorrected data

MADE IN ITALY

ECAS: PRE ASSEMBLED ON SCOTCH FOR EXTERNAL

	Description	Code	Power	Leght cable	m ² of product	Weight
210 W/m²	ECAS 210-240	025010101	240 W	1,9 m	1,0	2,01 kg
	ECAS 210-400	025020101	400 W	3,8 m	1,9	2,65 kg
	ECAS 210-630	025030101	630 W	5,8 m	2,9	3,45 kg
	ECAS 210-950	025040101	950 W	8,7 m	4,4	4,62 kg
	ECAS 210-1200	025050101	1200 W	11,5 m	5,8	5,76 kg
	ECAS 210-1700	025060101	1700 W	16,2 m	8,1	7,69 kg
	ECAS 210-2400	025070101	2400 W	22,9 m	11,5	10,43 kg
	ECAS 210-3600	025080101	3600 W	34,4 m	17,2	15,12 kg
320 W/m²	ECAS 320-500	025210101	500 W	3,1 m	1,6	2,34 kg
	ECAS 320-760	025220101	760 W	4,9 m	2,5	3,05 kg
	ECAS 320-880	025230101	880 W	5,6 m	2,8	3,37 kg
	ECAS 320-1150	025240101	1150 W	7,2 m	3,6	4,01 kg
	ECAS 320-1500	025250101	1500 W	9,2 m	4,6	4,82 kg
	ECAS 320-1600	025260101	1600 W	10,3 m	5,2	5,29 kg
	ECAS 320-2100	025270101	2100 W	13,1 m	6,6	6,43 kg
	ECAS 320-3000	025280101	3000 W	18,4 m	9,2	8,57 kg
	ECAS 320-4400	025290101	4400 W	28,2 m	14,1	12,57 kg

ECAR

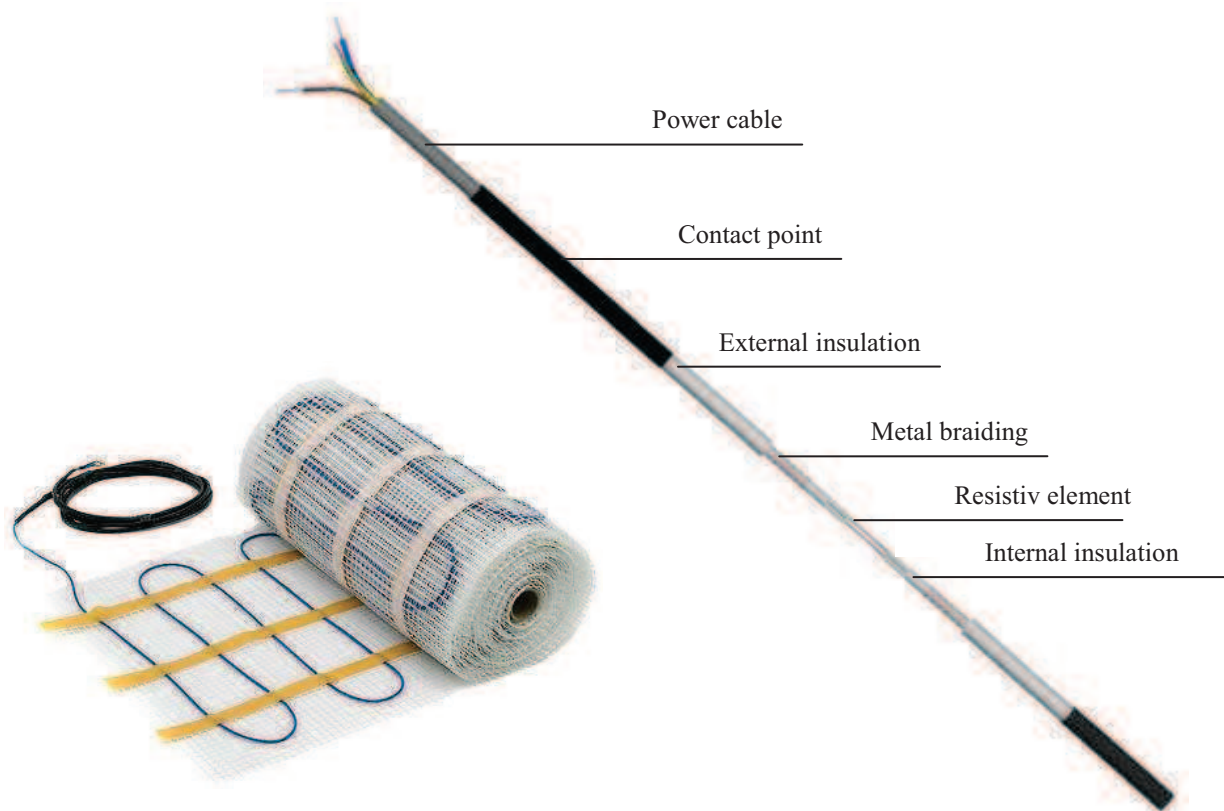

- Structure of the cable: heating cable with double conductor resistive pre assembled on scotch on glass fiber
- Width of the strip: 50 cm
- Internal insulation of the cable: fluoropolymer (FEP) – 0,3 mm
- Metal braiding: with 48 wire Ø0,17 mm tinned copper
- External cable insulation: PVC resistente a 105°C – 1,8 mm
- Outer diameter of the cable: 6,2 ÷ 8,9 mm
- Volt supply 230 Vac
- Protection class II
- Protection grade IP67
- Tolerance: from 25 to 200 W: ±10%, higher 200 W: +5% +20 W (choose the higher) -10%
- Minimum curvature radius: 4 times the diameter of the cable
- Power cable: 3*1.5 FG7 long 5 m
- UV protection: YES
- Self extinguishing cable: YES
- Colour of the cable: Black
- Marking of the cable: “C DESIGN * ICA xxx Ohm / m * CE * set – year”
- Certification 
- The company reserves the right to change without notice specifics of the products details declining any responsibility for uncorrected data

MADE IN ITALY

ECAR : EXTERNAL CABLE ON MESH

	Description	Code	Power	Leght cable	m ² of product	Weight
210 W/m²	ECAR 210-240	026010101	240 W	1,9 m	1,0	2,77 kg
	ECAR 210-400	026020101	400 W	3,8 m	1,9	3,72 kg
	ECAR 210-630	026030101	630 W	5,8 m	2,9	3,89 kg
	ECAR 210-950	026040101	950 W	8,7 m	4,4	5,28 kg
	ECAR 210-1200	026050101	1200 W	11,5 m	5,8	6,62 kg
	ECAR 210-1700	026060101	1700 W	16,2 m	8,1	8,90 kg
	ECAR 210-2400	026070101	2400 W	22,9 m	11,5	12,16 kg
	ECAR 210-3600	026080101	3600 W	34,4 m	17,2	17,70 kg
320 W/m²	ECAR 320-500	026210101	500 W	3,1 m	1,6	2,57 kg
	ECAR 320-760	026220101	760 W	4,9 m	2,5	3,41 kg
	ECAR 320-880	026230101	880 W	5,6 m	2,8	3,79 kg
	ECAR 320-1150	026240101	1150 W	7,2 m	3,6	4,55 kg
	ECAR 320-1500	026250101	1500 W	9,2 m	4,6	5,51 kg
	ECAR 320-1600	026260101	1600 W	10,3 m	5,2	6,06 kg
	ECAR 320-2100	026270101	2100 W	13,1 m	6,6	7,41 kg
	ECAR 320-3000	026280101	3000 W	18,4 m	9,2	9,95 kg
	ECAR 320-4400	026290101	4400 W	28,2 m	14,1	14,68 kg